

Pennsylvania Insert Corp
 PO Box 199
 Spring City PA 19475
 tel: 610-948-9688
 fax: 610-948-9750

email: sales@pennsylvaniainsert.com
 web: www.pennsylvaniainsert.com

Fax to:

Customer

Approved/Notes

Project

Project

Job#

Job#

Ship Date



PA Insert Quote/Order#

PA Insert Quote/Order#

Page ___ of ___

Designed to withstand H-20 wheel loading, suitable for use in off-street locations where not subject to high density traffic.

"Just Set" ALUMINUM DOOR, HEAVY DUTY, DOUBLE LEAF - NON-WATERTIGHT

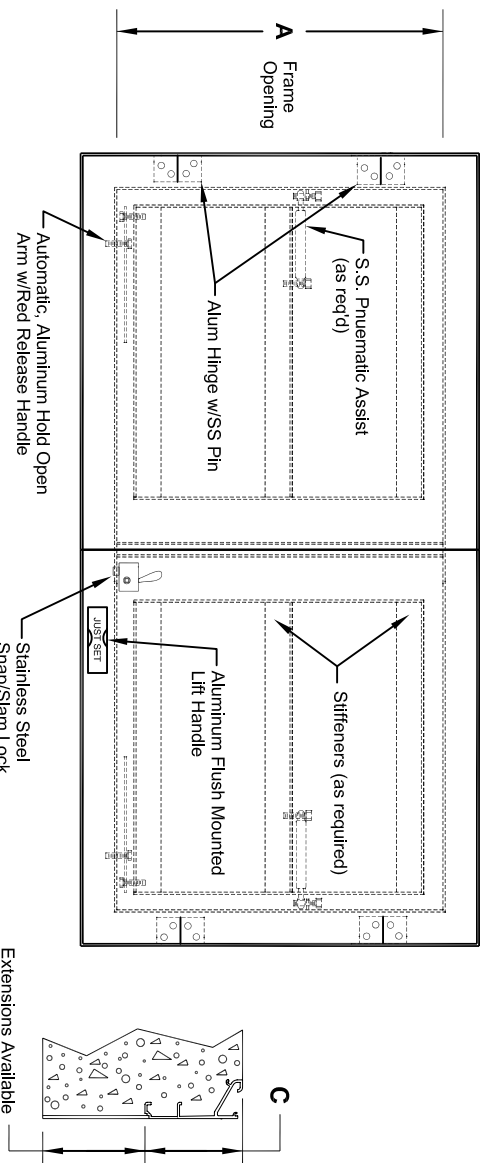

- 1/4" Diamond Plate Lid Reinforced for HS-20 Wheel Load w/out Impact
- 6" Frame with Gasket
- Protective Barrier where Concrete meets Aluminum
- Continuous Anchor to Lock Frame into Concrete
- Stainless Steel Pneumatic Assist (as req'd)
- Stainless Steel Hinges
- Stainless Steel Hardware
- Type 316 Stainless Steel Snap Lock
- Automatic Hold Open Arm with Red Release Handle
- Flush Mounted Lift Handle

STANDARD DIMENSIONS

QTY	A	B	C	STOCK#
	30"	48"	6.00"	*AYH3048D
	36"	48"	6.00"	*AYH3648D
	48"	48"	6.75"	*AYH4848D
	48"	72"	6.75"	*AYH4872D
	60"	60"	8.75"	*AYH6060D

An asterisk (*) next to stock number = stainless steel pneumatic assist is standard.

**Installation shall be in accordance with manufacturer's instructions

NO SCALE

10/25/06