

**Pennsylvania Insert Corp**  
 PO Box 199  
 Spring City PA 19475  
 tel: 610-948-9688  
 fax: 610-948-9750

email: sales@pennsylvaniainsert.com  
 web: www.pennsylvaniainsert.com

Fax to: \_\_\_\_\_ Customer \_\_\_\_\_

Project \_\_\_\_\_

Job# \_\_\_\_\_

PA Insert Quote/Order# \_\_\_\_\_

Approved/Notes



Designed to withstand H-20 wheel loading, suitable for use in off-street locations where not subject to high density traffic.

Ship Date \_\_\_\_\_

Page \_\_\_\_\_ of \_\_\_\_\_

**"Just Set" ALUMINUM DOOR, HEAVY DUTY, SINGLE LEAF - NON-WATERTIGHT**

- 1/4" Diamond Plate Lid Reinforced for HS-20 Wheel Loading without Impact
- 6" Frame with Gasket
- Protective Barrier where Concrete meets Aluminum
- Continuous Anchor to Lock Frame into Concrete
- Stainless Steel Pneumatic Assist (as req'd)
- Stainless Steel (Butt Style) Hinges & Hinge Pin Anchored with Steel Inserts.
- Stainless Steel Hardware
- Type 316 Stainless Steel Snap Lock
- Automatic Hold Open Arm with Red Release Handle
- Aluminum Flush Mounted Lift Handle

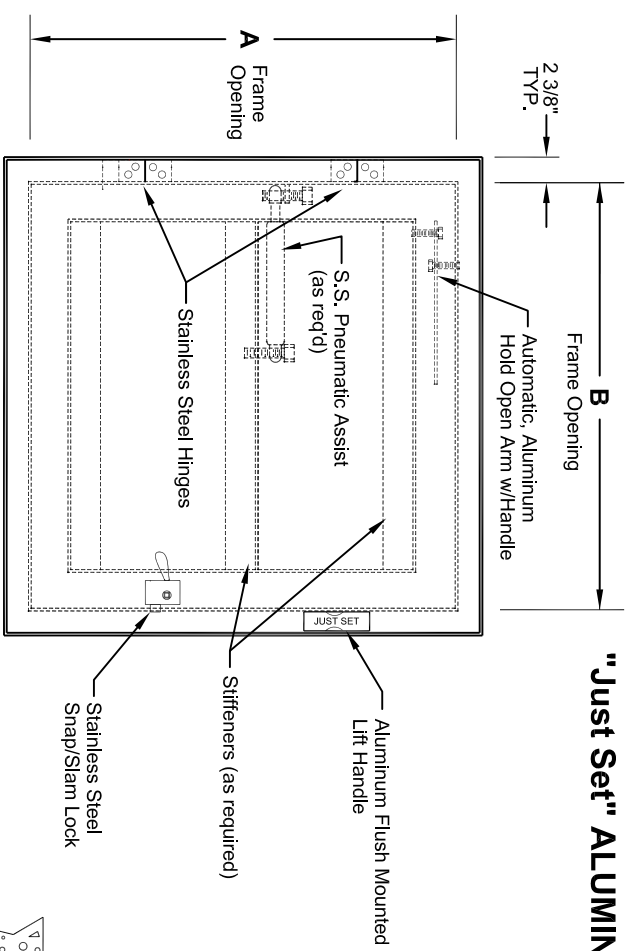

STANDARD DIMENSIONS				
QTY	A	B	C	STOCK#
	24"	24"	6.00"	AYH2424S
	30"	30"	6.00"	*AYH3030S
	36"	24"	6.00"	*AYH3624S
	36"	36"	6.00"	*AYH3636S
	42"	42"	6.50"	*AYH4242S
	48"	36"	6.50"	*AYH4836S
	48"	48"	6.50"	*AYH4848S

An asterisk (\*) next to stock number = stainless steel pneumatic assist is standard.

Installation shall be in accordance with manufacturer's instructions

NO SCALE

06/08/04