


Fax to:	Customer	Approved/Notes
From:	Project	
Date	Job#	Ship Date
	PA Insert Quote/Order#	Page ____ of ____

Pennsylvania Insert Corp	
PO Box 199	
Spring City PA 19475	
tel: 610-948-9688	
fax: 610-948-9750	
email: sales@pennsylvaniainsert.com	
web: www.pennsylvaniainsert.com	

"Just Set" ALUMINUM DOOR, STANDARD DUTY, DOUBLE LEAF - NON-WATERTIGHT

- 1/4" Diamond Plate Lid Reinforced for 300 lb/ft² live load
- 6" Frame (typ) with Gasket
- Protective Barrier where Concrete meets Aluminum
- Stainless Steel Pneumatic Assist (as req'd)
- Aluminum Hinge with S.S. Hinge Pin
- Stainless Steel Hardware
- Type 316 Stainless Steel Snap Lock
- Automatic Hold Open Arm with Red Release Handle
- Flush Mounted Lift Handle

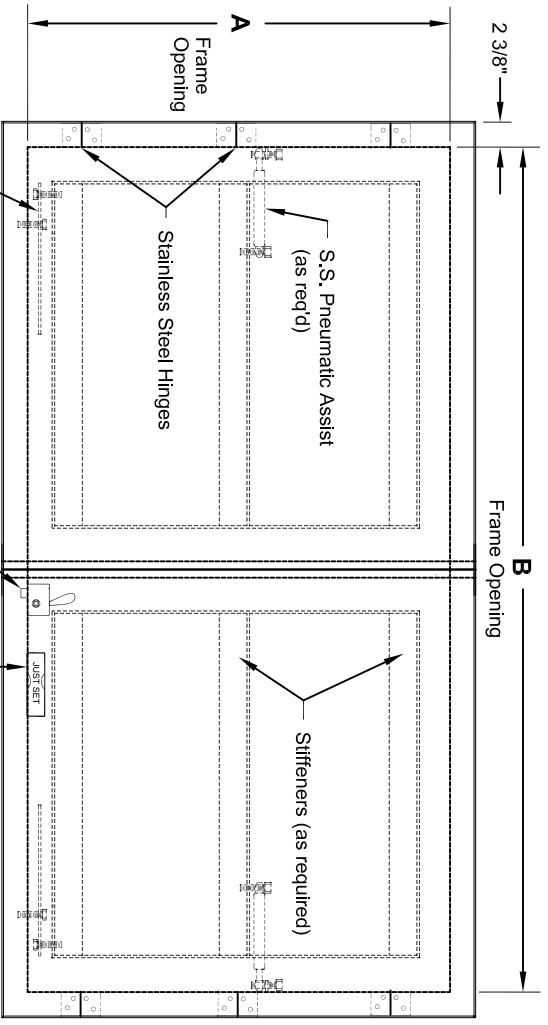

STANDARD DIMENSIONS				STOCK#
QTY	A	B	C	
	30"	48"	6.00"	AYS3048D
	36"	48"	6.00"	AYS3648D
	48"	48"	6.00"	*AYS4848D
	48"	72"	6.00"	*AYS4872D
	60"	60"	6.00"	*AYS6060D


An asterisk (*) next to stock number = stainless steel pneumatic assist is standard.

OPTIONS

- Frame Extension for ____" Slab
- Insulation
- Safety Chains & Posts
- Stainless Steel Compression Spring
- Anodizing

LOCK OPTIONS

- Staple For Padlock
- Recessed Hasp
- Keyed Deadbolt Lock
- Pentahed Lock
- Heavy Duty Security Lock

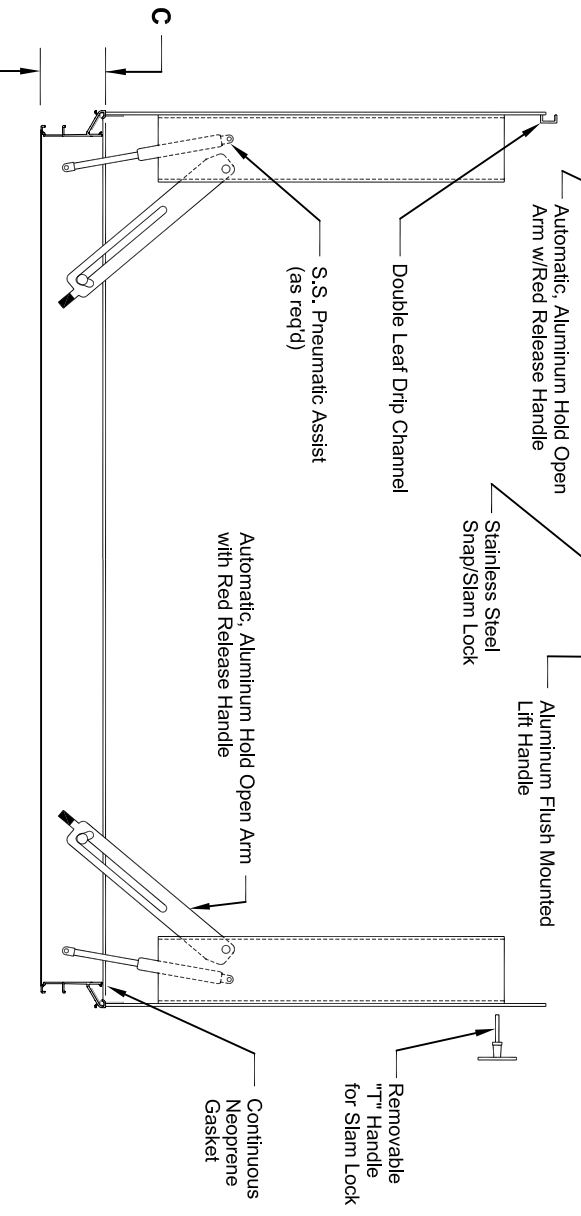

Installation shall be in accordance with manufacturer's instructions

NO SCALE

10/25/06

