



Pennsylvania Insert Corp
 PO Box 199
 Spring City PA 19475
 tel: 610-948-9688
 fax: 610-948-9750
 email: sales@pennsylvaniainsert.com
 web: www.pennsylvaniainsert.com

Fax to:	Customer	Approved/Notes
Project	Job#	Ship Date
PA Insert Quote/Order#	Page ____ of ____	

"Just Set" ALUMINUM DOOR, STANDARD DUTY, SINGLE LEAF - NON-WATERTIGHT

- 1/4" Diamond Plate Lid Reinforced for 300 lb/ft² live load
- 6" Frame (typ) with Gasket
- Protective Barrier where Concrete meets Aluminum
- Continuous Anchor to Lock Frame Into Concrete
- Stainless Steel Pneumatic Assist as required
- Stainless Steel Hinges
- Stainless Steel Hardware
- Type 316 Stainless Steel Snap Lock
- Automatic Hold Open Arm with Red Release Handle
- Flush Mounted Lift Handle

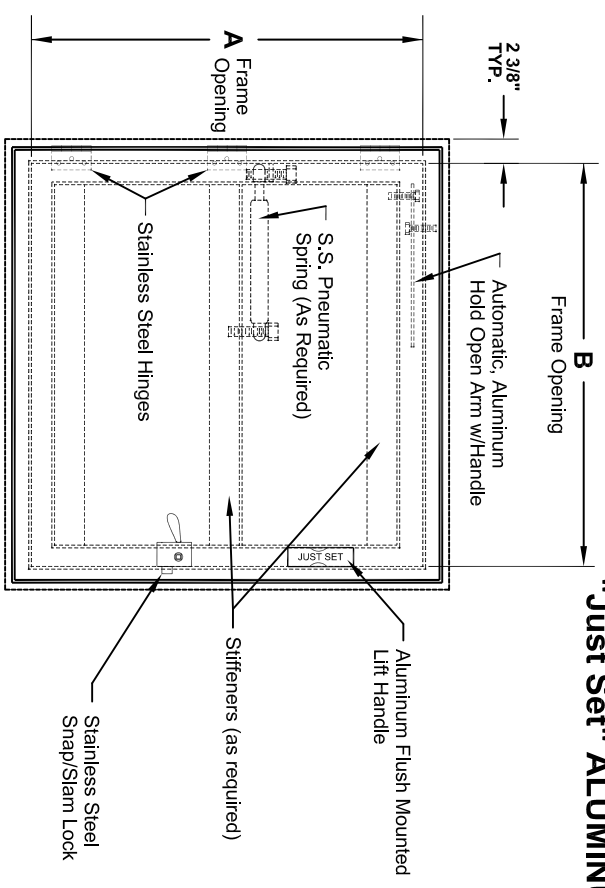

STANDARD DIMENSIONS				
QTY	A	B	C	STOCK#
	24"	24"	6.00"	AYS2424S
	30"	24"	6.00"	AYS3024S
	30"	30"	6.00"	AYS3030S
	36"	24"	6.00"	AYS3624S
	36"	30"	6.00"	*AYS3630S
	36"	36"	6.00"	*AYS3636S

An asterisk (*) next to stock number = stainless steel compression spring is standard.

OPTIONS

- Frame Extension for ____" Slab
- Insulation
- Safety Chains & Posts
- Stainless Steel Pneumatic Assist
- Anodizing

LOCK OPTIONS

- Staple For Padlock
- Recessed Hasp
- Keyed Deadbolt Lock
- Pentahed Lock
- Heavy Duty Security Lock

Installation shall be in accordance with manufacturer's instructions

NO SCALE

06/05/04