


"Just Set" ALUMINUM DOOR, STANDARD DUTY, SINGLE LEAF - NON-WATERTIGHT

- 1/4" Diamond Plate Lid Reinforced for 300 lb/ft² live load
- 6" Frame (typ) with Gasket
- Protective Barrier where Concrete meets Aluminum
- Continuous Anchor to Lock Frame into Concrete
- Stainless Steel Pneumatic Assist as required
- Stainless Steel Hinges
- Stainless Steel Hardware
- Type 316 Stainless Steel Snap Lock
- Automatic Hold Open Arm with Red Release Handle
- Flush Mounted Lift Handle

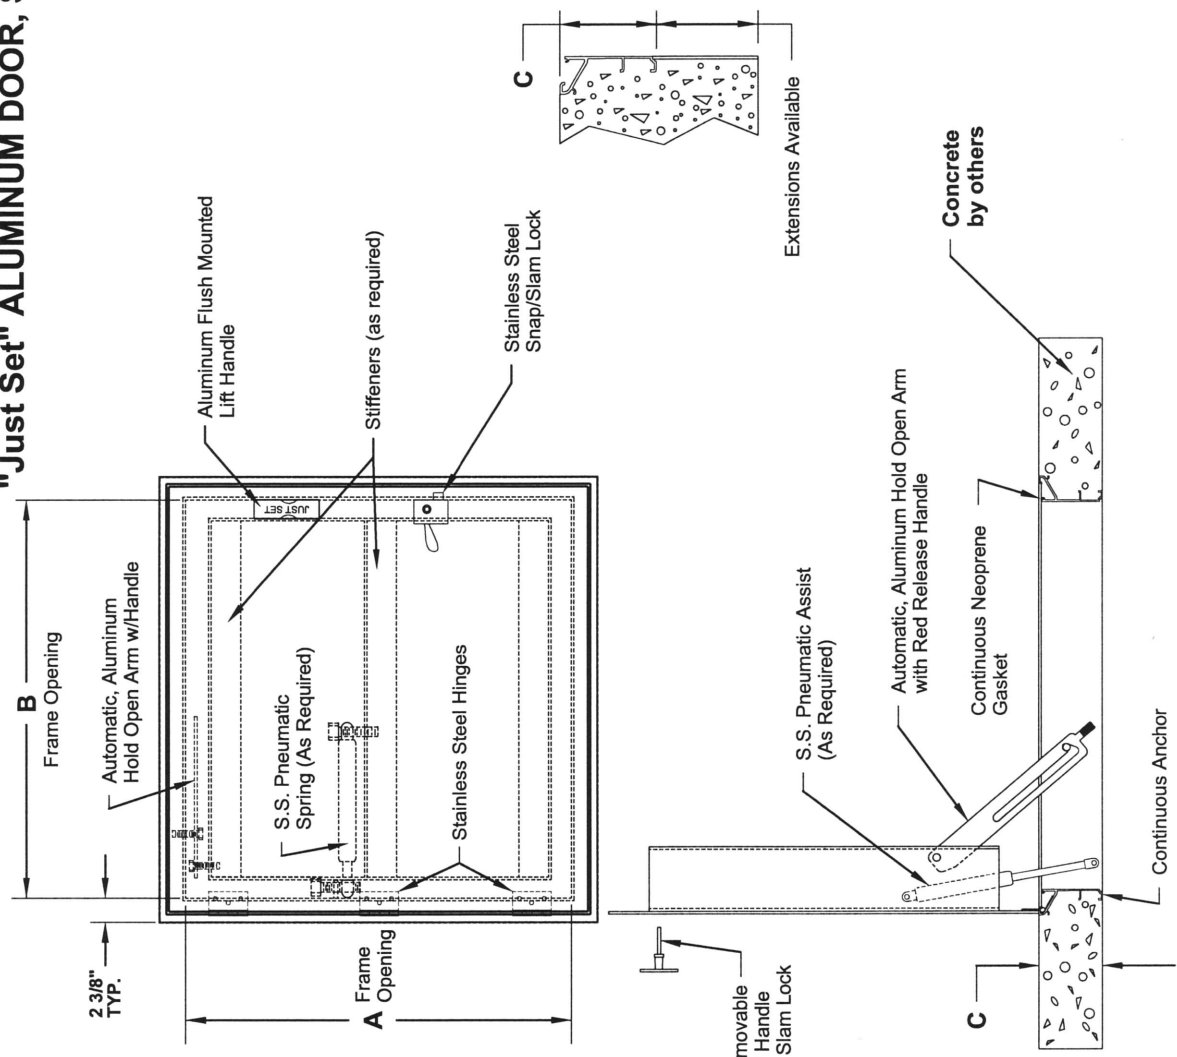

STANDARD DIMENSIONS				
QTY	A	B	C	STOCK#
	24"	24"	6.00"	AYS2424S
	30"	24"	6.00"	AYS3024S
	30"	30"	6.00"	AYS3030S
	36"	24"	6.00"	AYS3624S
	36"	30"	6.00"	*AYS3630S
	36"	36"	6.00"	*AYS3636S
	42"	42"	6.00"	*AYS4242S
	48"	48"	6.00"	*AYS4848S

An asterisk (*) next to stock number = stainless steel compression spring is standard.

Installation shall be in accordance with manufacturer's instructions

NO SCALE

